



BS-EN54-2
BS-EN54-4
KM 73505

Features

- 2 or 4 loop versions as standard (for 6 - 8 loop versions see DS57)
- Larger enclosure available (fits 24A/H SLAs)
- Loopless panel option (repeater)
- 0, 16, 48, or 96 zone indicators
- Option for Enable Control keyswitch
- Fully supports Apollo, Argus Vega & Hochiki protocols
- Network up to 64 panels/repeaters
- 4 programmable sounder circuits as standard
- 5.25 amp power supply to EN54 part 4
- Large graphic display
- In built help and alarm information screens
- Certified to EN54-2/ EN54-4
- Real time clock
- Supports Apollo, Argus Vega and Hochiki loop powered sounders and beacons
- Sensitivity adjustment and Drift Compensation
- Stylish enclosure design
- Soft-touch tactile buttons
- 2 programmable function buttons
- 3 programmable front panel mounted LED's
- Improved Front loading Printer (optional)
- Up to 512 programmable inputs/outputs per panel via 2 wire RS485 serial link (optional)
- Simple Windows® graphical configuration utility

xplorer

(Also backward-compatible with Series 90 detectors)

XP95

DISCOVERY

ARGUS SECURITY

series90

HOCHIKI
ESL
COMPATIBLE

Product Overview

- Available with 2 or 4 detection circuits, each capable of hosting up to 126 devices (Apollo), 240 devices (Argus Vega) or 127 devices (Hochiki). Syncro uses the most advanced microprocessor technology to provide a control system of extremely high integrity.
- Syncro can be configured to suit all types of system, from the most simple, to the highly complex. Its fully integrated and secure network provides an intelligent interface for building control.
- A large area graphic display ensures that information is presented in plain language with detailed extra help available by pressing a 'help' button.
- Syncro supports three of the most widely used communication protocols produced by leading fire detector manufacturers and employs daily calibration routines to ensure that the system is always at optimum performance.

Config. Features

- Comprehensive day/night mode facility
- Programmable one touch test mode
- Powerful and versatile cause & effect programming
- Cause & effect wizard including:
 - Cause & effect action
 - Disabling configuration
 - Test mode configuration



Model No. EN#6396403P

Panels

2 Loop Panels
4 Loop Panels
4 Loop Panels
Larger Enclosure

Product Code	Loops	Zones	Size (mm)
EN#6300203	2	0	500 x 355 x 117
EN#6316203	2	16	500 x 355 x 117
EN#6348203	2	48	500 x 355 x 117
EN#6396203	2	96	500 x 355 x 117
EN#6300403	4	0	500 x 355 x 117
EN#6316403	4	16	500 x 355 x 117
EN#6348403	4	48	500 x 355 x 117
EN#6396403	4	96	500 x 355 x 117
EN#6300415	4	0	500 x 460 x 190
EN#6316415	4	16	500 x 460 x 190
EN#6348415	4	48	500 x 460 x 190
EN#6396415	4	96	500 x 460 x 190


`#` - replace with `A` for Apollo protocol,
`V` for Argus Vega protocol or `H` for Hochiki protocol.
Flush versions are available to order (See price guide).
For fitted printer add `P` after stock code.
For Enable Keyswitch add `S` after `EN` in the stock code.

Options

Product Code	Description
K552#	Loop extension card (loops 3 & 4)
K555	Fault tolerant Network interface card
K768SYN	Thermal printer kit (for retrofitting to non-printer models)
K560	16 channel input/output board
K547	8 way relay extender board
K546	6 way sounder extender board
K545	4 way conventional detection zone board
K556P	Modem module (PSTN)
B3472	Thermal Printer Paper Roll


`#` - replace with `A` for Apollo protocol,
`V` for Argus Vega protocol or `H` for Hochiki protocol.

Flush Syncro Control Panel

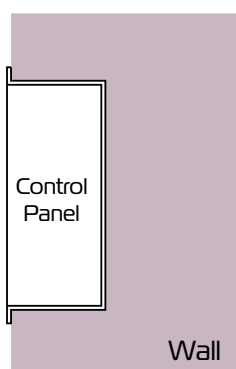

Flush mount cross section

Note: There is one size for all standard flush Syncro control panels. For the hole size we recommend that you allow 5mm clearance all round.

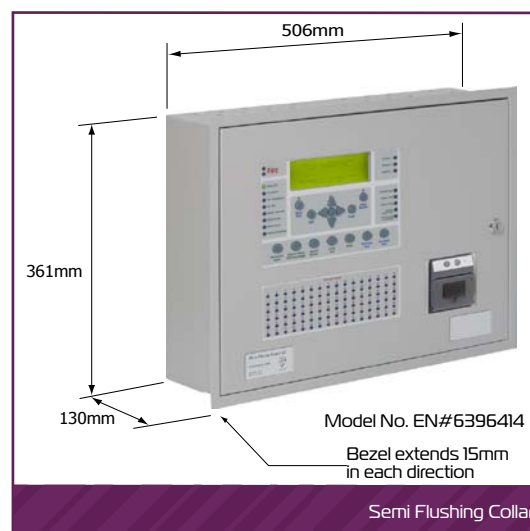

Technical

Construction	- 1.2mm mild sheet steel
IP Rating	- IP30
Finish	- Epoxy powder coated
Colour - lid & box	- BS 00 A 05 grey - fine texture
Colour - controls plate & labels	- RAL 7047 light grey - satin
Weight	- 10kg (standard panel)
Display	- 8 lines of 40 characters graphic LCD
Detection circuits (Loops)	- 2 or 4 (400mA each)
Zone LED's	- 0, 16, 48, or 96 (up to 500 software zones)
4 sounder circuits	- Each fused at 1 Amp (total load 2 Amp)
Fire contact	- Volt free 1 Amp 30V DC
Alarm contact	- Volt free 1 Amp 30V DC
Fault contact	- Volt free 1 Amp 30V DC
Programmable relay 1	- Volt free 1 Amp 30V DC
Programmable relay 2	- Volt free 1 Amp 30V DC
Fire routing output	- Monitored-voltage reversing, fused at 500mA
Fault routing output	- Monitored-voltage reversing, fused at 500mA
Extinguisher output	- Monitored-voltage reversing, fused at 1A
Fault input	- Volt free contact input signals fault
Reset input	- Volt free contact input resets panel
Intermittent input	- Volt free contact input pulses sounder outputs
Continuous input	- Volt free contact input for continuous sounders
Silence input	- Volt free contact input silences sounders
Programmable input 1	- Volt free contact for any action required
Programmable input 2	- Volt free contact for any action required
Programmable input 3	- Volt free contact for any action required
Auxiliary 24V DC output	- Fused at 500mA
System fuse	- 5 Amp self-resetting polyfuse
Mains fuse	- 20mm 3 Amp
Operating Temperature	- -5 to +50 deg. C
Operating humidity	- To 95% (non-condensing)
Mains voltage supply	- 110 or 230V AC 50 or 60 Hz. (specify when ordering, default is 230V)
Battery (24 hour standby)	- 12Ah 12V (2 per panel) (non-networked)
Day/night modes	- 2 with variable device sensitivity
Input delays	- Individual for each device selectable up to 2 minutes
Output delays	- Individual 2-stage to 10 minutes per stage
2 programmable function buttons	- Programmable to carry out any cause & effect, disablement or test action
3 programmable indicators	- Red/yellow/green to indicate any action
Network (option)	- Up to 64 panels on 2 wires (K555 Network Card required)
Printer (option)	- New front loading feature
Download lead	- S187 (standard) or X187LS (economy)